





Interline® 925

- Epoxy Lining – 100% volume solids
- Drinking water approval in some regions

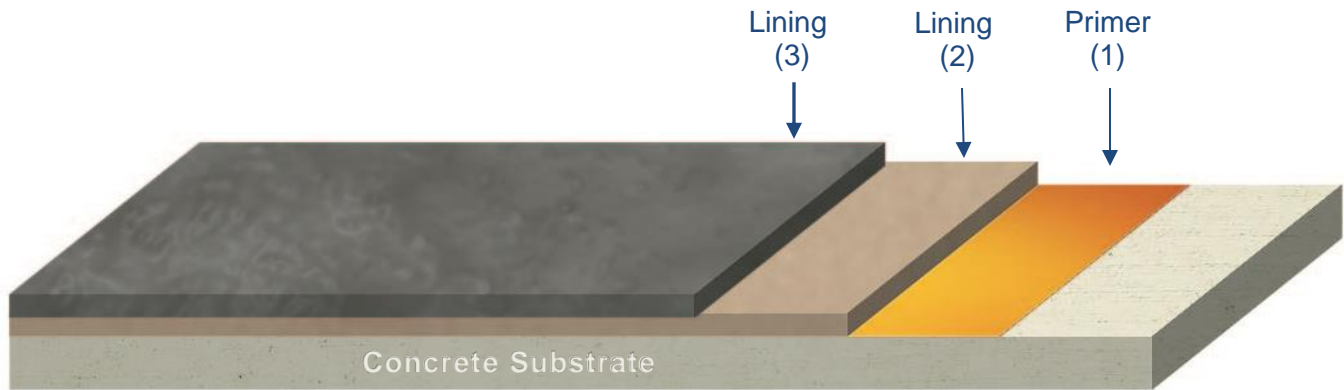

Typical total system thickness: 600µm (24mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 680M Resin	5 m ² /litre	200 sq.ft./gal.	
2	Lining	300µm	12mil	Interline 925	2.8 m ² /litre	110 sq.ft./gal.	
3	Lining	300µm	12mil	Interline 925	2.8 m ² /litre	110 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/interline-925>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

**All coverage rates are practical, for guidance only, and may vary due to a number of factors