




Enviroline® 2405

- Hybrid epoxy lining
- Excellent high temperature resistance to hydrocarbons
- Quick cure reduces downtime

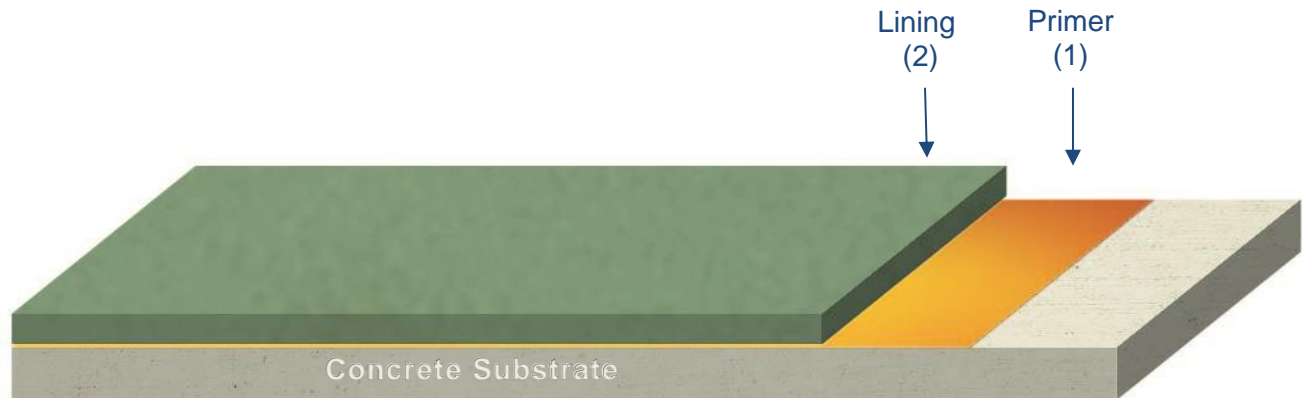

Typical total system thickness: 500µm (20mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 680M Resin	5 m ² /litre	200 sq.ft./gal.	
2	Lining	500µm	20mil	Enviroline 2405	1.7 m ² /litre	70 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/enviroline-2405>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

**All coverage rates are practical, for guidance only and may vary due to a number of factors