






# Ceilcote® 222GF MR Flakeline System

- Graphite filled novolac vinyl ester lining over a mat reinforced basecoat
- Excellent acid resistance including hydrofluoric acid
- Can be used on floors where electrical conductivity is required
- Reinforced, high build for added strength, durability and dynamic crack bridging

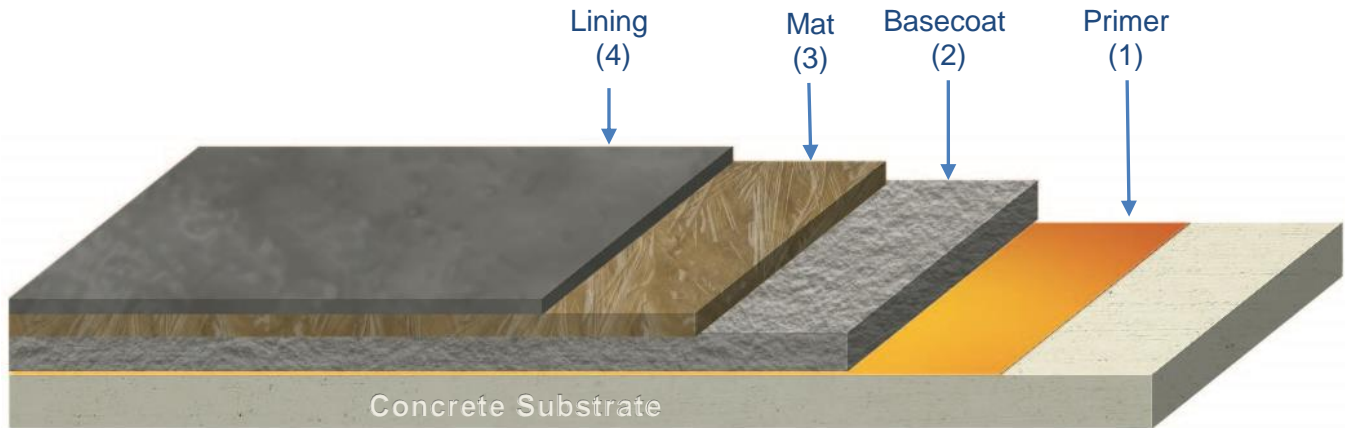

**Typical total system thickness: 2800µm (112mil)**

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 380 Resin	5 m <sup>2</sup> /litre	200 sq.ft./gal.	
2	Basecoat	1500µm	60mil	Ceilcote 370HT Resin	1 m <sup>2</sup> /litre	40 sq.ft./gal.	
				Ceilcote S1 Powder	0.4 m <sup>2</sup> /kg	2 sq.ft./lb	
3	Reinforcement Mat	800µm	32mil	Ceilcote 370HT Resin	1.2 m <sup>2</sup> /litre	50 sq.ft./gal.	
				Ceilcote FG mat (450 gram/m <sup>2</sup> - 1.5oz.)	Allow 10% extra		
4	Lining	500µm	20mil	Ceilcote 222GF Flakeline	1.5 m <sup>2</sup> /litre	60 sq.ft./gal.	

## Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

\*All thicknesses given are typical and may change dependent on service conditions.

\*\*All coverage rates are practical, for guidance only and may vary due to a number of factors