


# Enviroline 230

## Advanced performance lining for potable water

A high performance, two component, solvent free epoxy phenolic lining with excellent abrasion resistance. Enviroline® 230 is specifically designed to provide both potable water resistance and application productivity.

- Certified to NSF/ANSI Standard 61 for direct contact with potable water, including commercial hot water up to 180°F (82°C)
- Can be used in process vessels for hot potable water
- Meets AWWA C-210-07 performance requirements making it suitable for pipelines
- Rapid cure times allows storage tanks and vessels can be coated, cured and returned to immersion service within 16 hours
- Fast return to service reduces downtime and disruption caused by the equipment being out of service
- Excellent impact resistance due to thick film characteristics aids turnaround times and clean outs

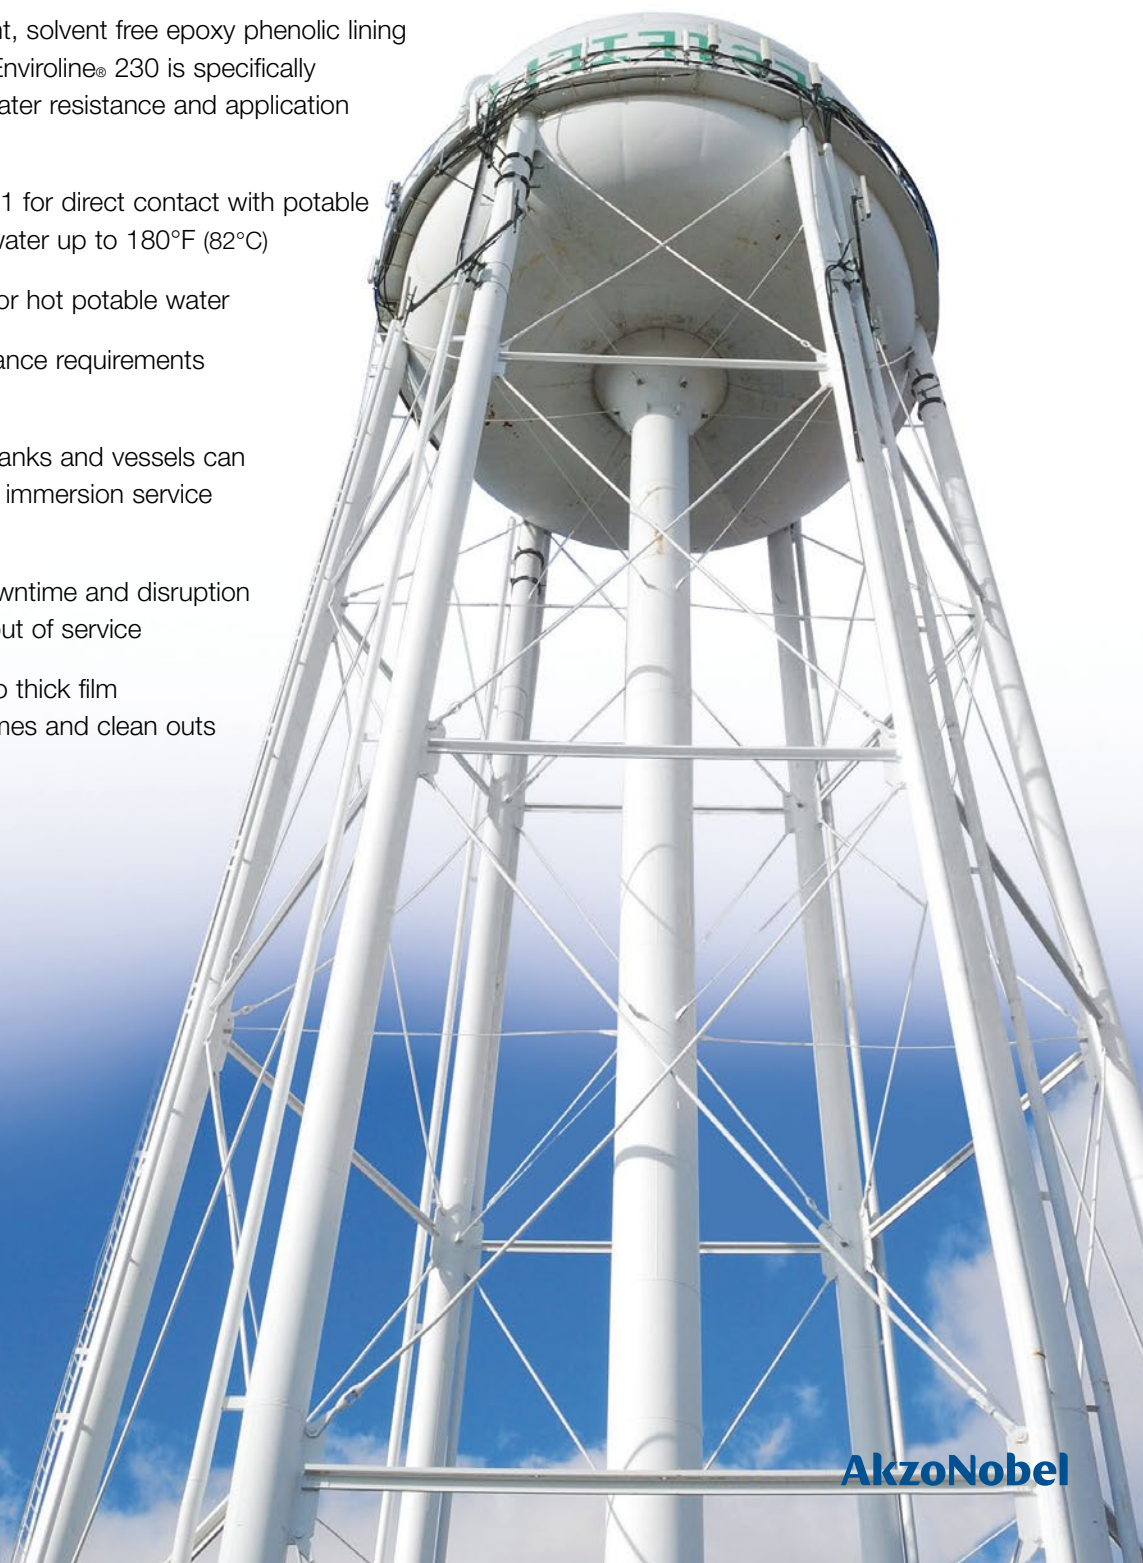

# Enviroline 230 is certified to NSF/ANSI Standard 61

**180°F**  
**(82°C)**



With rapid cure, high build and durable film characteristics, Enviroline® 230 is an easy choice for coating steel and concrete substrates which will be holding potable water.

## NSF / ANSI Standard 61 certification

Certified to the rigorous NSF standards for continuous potable water immersion up to temperatures of 180°F (82°C), Enviroline® 230 is a lining you can trust when it comes to long term performance.

## Short and long term benefits

Enviroline® 230 is a thick film coating and can be applied as a single coat through conventional airless equipment. Excellent abrasion and impact resistance combined with fast cure enables both a quick return to service in the short term and reduced turnaround times and clean outs in the long term.

## Technical information

Volume solids	100%
Typical thickness	20 - 50 mils (500 - 1,250 µm) DFT
Application method	Plural component or conventional airless spray

## Test data

TEST TYPE	TEST METHOD	RESULTS
Taber abrasion resistance	ASTM D4060 (1,000 cycles/CS-17/1 kg) - Weight loss - Wear rate (per 1,000 cycles)	52 mg 0.40 mils
Direct impact resistance	ASTM D2794	160 in-lbs
Adhesive strength to concrete	ASTM D4541	450 psi (37.2 kg/cm <sup>2</sup> ) cohesive failure within concrete
Adhesive strength to steel	ASTM D4541	Typically > 1450 psi (10 MPa)
Cathodic disbondment (attached cell method)	CAN/CSA Z245.20-M92 (ASTM G95) 3% NaCl/1.5V/28 days 0.125 in (3.2 mm) holiday	@ 75°F (24°C) 0 mm disbondment @ 149°F (65°C) 6.0 mm disbondment
Hot water resistance	ASTM C868-02 @ 180°F (82°C)	No blistering, rusting, softening, or delamination
NSF/ANSI Standard 61	ANSI/NSF Standard 61	Certified by NSF up to 180°F (82°C)
Permeation testing	ASTM D790 100% RH @ 140°F (60°C)	Avg WVT – 21.8 meters sq/day Avg permeance – 0.0144 perm Avg permeability – 0.00069 perm inch

The above performance data has been compiled based on present experience of in-service product performance and upon performance data obtained under laboratory test conditions. Actual performance of the product will depend upon the conditions in which the product is used.

[www.international-pc.com](http://www.international-pc.com)  
[pcmarketing.americas@akzonobel.com](mailto:pcmarketing.americas@akzonobel.com)

All trademarks mentioned in this publication are owned by the AkzoNobel group of companies. © Akzo Nobel 2014. AkzoNobel has used its best endeavors to ensure that the information contained in this publication is correct at the time of printing. Please contact your local representative if you have any questions. Unless otherwise agreed by us in writing, any contract to purchase products referred to in this brochure and any advice which we give in connection with the supply of products are subject to our standard conditions of sale.