


Interthane 990

Long term recoatability with aesthetics

Across the world, people are experiencing flexible application, extended recoat windows and reduced surface preparation costs with Interthane® 990.

You can specify and apply Interthane polyurethane in a range of colors or as a metallic finish; both deliver high aesthetic impact.

- High performance acrylic polyurethane finish coat
- Extensive color range from Chromascan®
- High quality reds, yellows and oranges
- Metallic color range for high profile steelwork
- Excellent brush, roller and spray characteristics
- Good drying and handling characteristics
- Flexible film gives a good resistance to mechanical damage
- Extended overcoating

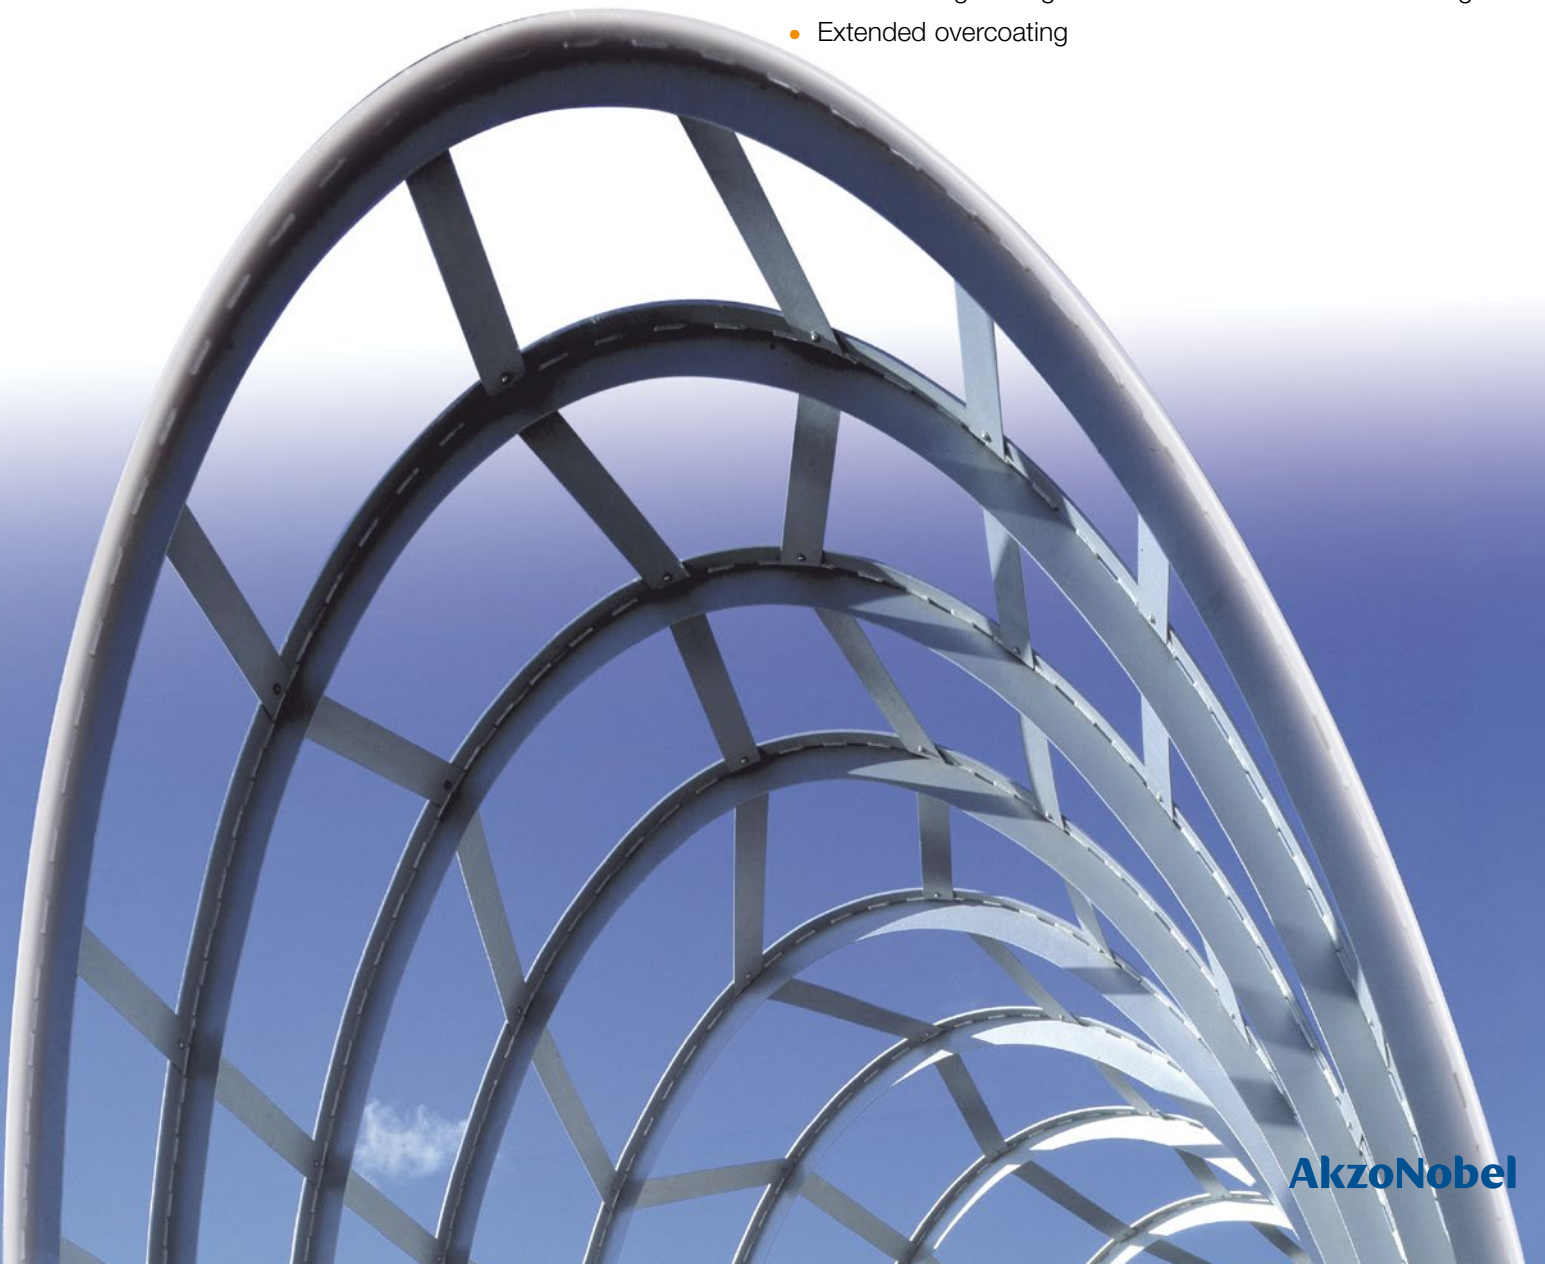

Interthane 990 is a two component acrylic urethane finish providing excellent durability and long term recoatability

Interthane® 990 is suitable for use in both new construction and as a maintenance finish. It can be used on a wide variety of assets in many different environments. Structures serving the offshore oil and gas, chemical and petrochemical, mining and power industries as well as bridges and infrastructure have all benefited from the protection of Interthane® 990.

Intended uses

Interthane® 990 is a typical recommendation where there is a requirement for a long term, durable finish to be applied over a high performance anti-corrosive system.

Global availability

As part of our global product range, Interthane® 990 is available anywhere in the world, to the same standard and quality.

Technical information

Color	Wide range via the Chromascan® system		
Gloss level	High Gloss		
Volume solids	57% ± 3% (depends on the color)		
Film thickness	2-3 mils (50-75 µm) dry		
Mix ratio	6:1 by volume		
Temperature		Overcoating interval	
	Touch Dry	Minimum	Maximum
41°F (5°C)	5 hours	24 hours	Extended
59°F (15°C)	2.5 hours	10 hours	Extended
77°F (25°C)	1.5 hours	6 hours	Extended
104°F (40°C)	1 hours	3 hours	Extended
VOC's	3.50 lb/gal (420 g/ltr) EPA Method 24, 3.41 g/kg EU Solvent Emissions Directive (Council Directive 1999/13/EC)		

Test data

	TEST METHOD	SPECIFICATION DETAILS	RESULTS
Pull-off adhesion	ISO 4624	1 x 2-3 mils (50-75 µm) DFT Interthane® 990 applied directly over an epoxy primer	Typically 1450 psi (10 Mpa)
Pencil hardness	ASTM D3363	1 x 2-3 mils (50-75 µm) DFT applied Interthane® 990 applied directly to Sa2.5 (SSPC-SP6) blasted steel	Classification B to HB.
Impact resistance	ASTM D2794	1 x 2-3 mils (50-75 µm) DFT applied Interthane® 990 applied directly to Sa2.5 (SSPC-SP6) blasted steel	Direct impact resistance typically 5 Joules
Gloss retention	ASTM D523	1 x 2-3 mils (50-75 µm) DFT Interthane® 990 applied directly over an aluminium Q-panel	Typical gloss retention of 90% following 1000 hours exposure to UV - A type Fluorescent Lamps
Mandrel bend test	ASTM D522	1 x 2-3 mils (50-75 µm) DFT Interthane® 990 applied directly over an aluminium panel	Typically 30% elongation.
Abrasion resistance	ASTMD4060	1 x 2-3 mils (50-75 µm) DFT Interthane® 990 applied directly to Sa2.5 (SSPC-SP6) blasted steel	Average of 68 mg weight loss per 1000 cycles using CS10 wheels and a 1 kg loading

The above performance data has been compiled based on present experience of in-service product performance and upon performance data obtained under laboratory test conditions. Actual performance of the product will depend upon the conditions in which the product is used.

www.international-pc.com
pcmarketing.americas@akzonobel.com

All trademarks mentioned in this publication are owned by the AkzoNobel group of companies. © Akzo Nobel 2014. AkzoNobel has used its best endeavors to ensure that the information contained in this publication is correct at the time of printing. Please contact your local representative if you have any questions. Unless otherwise agreed by us in writing, any contract to purchase products referred to in this brochure and any advice which we give in connection with the supply of products are subject to our standard conditions of sale.