




Intercrete® 4841

- Cementitious water based lining
- Has DWI drinking water approval
- Improved chemical and abrasion resistance compared to concrete
- Can be applied over wet and green (new) concrete

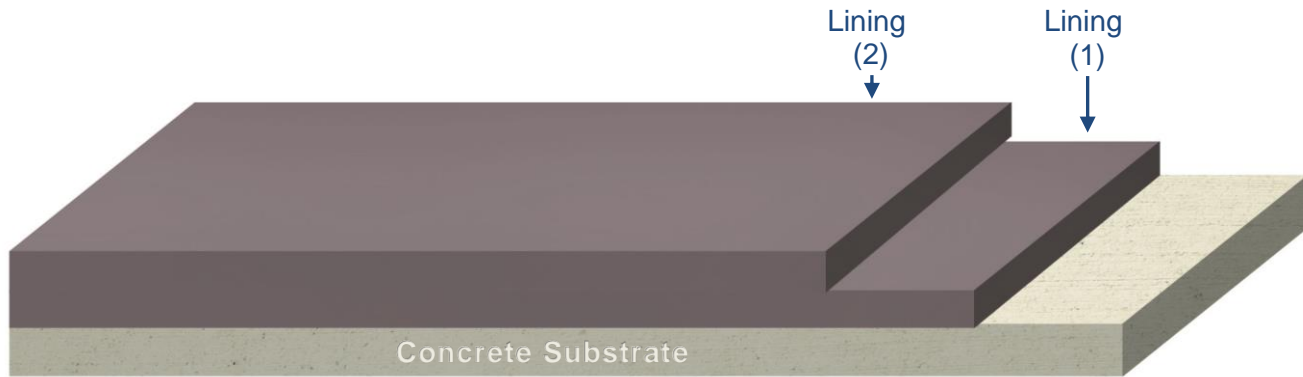

Typical total system thickness: 2000µm (32mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Lining	1000µm	40mil	Intercrete 4841	0.56 m ² /kg	2.7 sq.ft./lb.	
2	Lining	1000µm	40mil	Intercrete 4841	0.56 m ² /kg	2.7 sq.ft./lb.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/intercrete-4841>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

**All coverage rates are practical, for guidance only and may vary due to a number of factors

On some horizontal surfaces, or by building up layers during spray application, Intercrete 4841 may be applied at a thickness of 1x2mm