

Intertherm® 751CSA



Challenging Thermal Spray Aluminum

since **2004** Widely specified in some of the most harsh and aggressive high temperature areas in Oil and Gas facilities

Providing outstanding protection against the most aggressive cyclical temperature environments and under insulation conditions while offering the flexibility of application using standard equipment while being particularly effective in maintenance situations

150°C (302°F)

Can be applied in-situ application to steel substrates operating at temperatures up to 150°C (302°F)

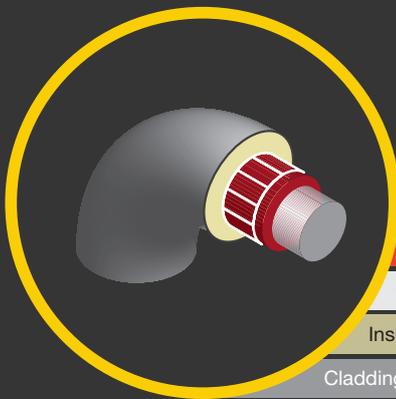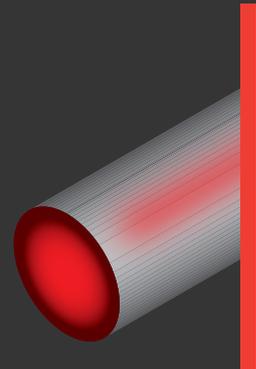

- Intertherm 751CSA
- Corrosion Barrier
- Insulation
- Cladding / Sheathing

Designed to address the need for **high temperature** resistance and superior corrosion protection; even in harsh **CUI** and **thermal shock** environments.



No hot work required

Keep production going

Quick application and return to service with High build One coat capability (200µm in one coat)

