

Interfine 878

Color and gloss that lasts

With four times longer color and gloss retention, it's no wonder that leading companies from all over the world choose Interfine[®] 878.

Your asset will look better for longer which means reduced maintenance.

- A high performance, high solids acrylic polysiloxane finish
- A step change in long term color and gloss compared to catalyzed acrylic and polyurethane topcoats
- Enhanced aesthetics and durability provides extended lifetime to first maintenance when utilized as part of a high performance anti-corrosive system
- Extensive color range from the Chromascan[®] remote tinting system
- Ideally suited for both roller and spray application
- Very low VOC content which assists in reducing solvent emissions and complies to VOC legislation
- Excellent long term flexibility versus epoxy containing finishes makes Interfine[®] 878 ideal for use on tanks, vessels, cranes and other such structures likely to be subjected to movement



Suited to projects where long term looks and reduced maintenance are important. Reduce your lifecycle costs.

Interfine® 878 is a tough, hard wearing finish coat, which exhibits excellent flexibility and affords good protection against spills and splashes of a range of chemicals.

Suitable for application over properly primed surfaces by spray and roller, Interfine® 878 is an ideal solution where legislation prevents the use of isocyanate cured polyurethane systems or restricts solvent emission levels (VOC).


Outstanding durability

Careful formulation has resulted in a finish coat providing levels of gloss and color retention that demonstrate significant improvement when compared to acrylic polyurethane and catalyzed acrylic topcoats. These performance characteristics make Interfine® 878 ideally suited for use on general industrial and commercial steelwork where high standards of cosmetic appearance and aesthetics are a key requirement.

Chromascan®

Interfine® 878 is available in a full range of colors via the Chromascan® remote tinting system. This means that project shades can be met rapidly, in small volumes whenever necessary, allowing easy touch up either on-site or prior to shipment.

Gloss retention

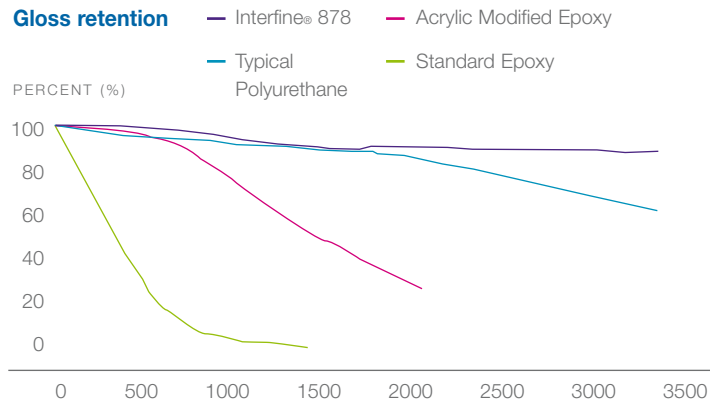

Technical information

Color	Wide range via the Chromascan® system
Gloss level	High Gloss
Volume solids	72%
Film thickness	2-3 mils (50-75 microns) dry
VOCs	50-2.05 lb/gal (246 g/l) EPA Method 24
	194 g/kg EU Solvent Emissions Directive (Council Directive 1999/13/EC)

Test data

TEST TYPE	REFERENCE	DETAILS	RESULTS
Pull-off adhesion	ISO 4624	1 x 2-3 mils (50-75 µm) DFT Interfine® 878 applied directly over an epoxy primer	Typically 1450 psi (10 Mpa)
Impact resistance	ASTM D2794	1 x 2-3 mils (50-75 µm) DFT Interfine® 878 applied directly to Sa2.5 (SSPC-SP6) blasted steel	Direct impact resistance typically 5 Joules
Gloss retention	ASTM D523	1 x 2-3 mils (50-75 µm) DFT Interfine® 878 applied directly over an aluminium Q-panel	Typically >89% gloss retention following 3000 hours exposure to UV - A type fluorescent lamps
Flexibility	ASTM D522	1 x 5 mils (125 µm) DFT Interfine® 878 applied directly over abraded steel plate. Panels aged 28 days	No cracking at 3/16 in (4.7 mm) mandrel diameter

The above performance data has been compiled based on present experience of in-service product performance and upon performance data obtained under laboratory test conditions. Actual performance of the product will depend upon the conditions in which the product is used.

www.international-pc.com
pcmarketing.americas@akzonobel.com

All trademarks mentioned in this publication are owned by the AkzoNobel group of companies. © Akzo Nobel 2014. AkzoNobel has used its best endeavors to ensure that the information contained in this publication is correct at the time of printing. Please contact your local representative if you have any questions. Unless otherwise agreed by us in writing, any contract to purchase products referred to in this brochure and any advice which we give in connection with the supply of products are subject to our standard conditions of sale.