




Enviroline® 376F-60

- Epoxy novolac lining - 100% volume solids
- Incorporates pre-dispersed glass fibre and flake filling
- Excellent resistance to hydrocarbons including biofuels
- Quick cure (14 hours @ 25°C/77°F) reduces downtime

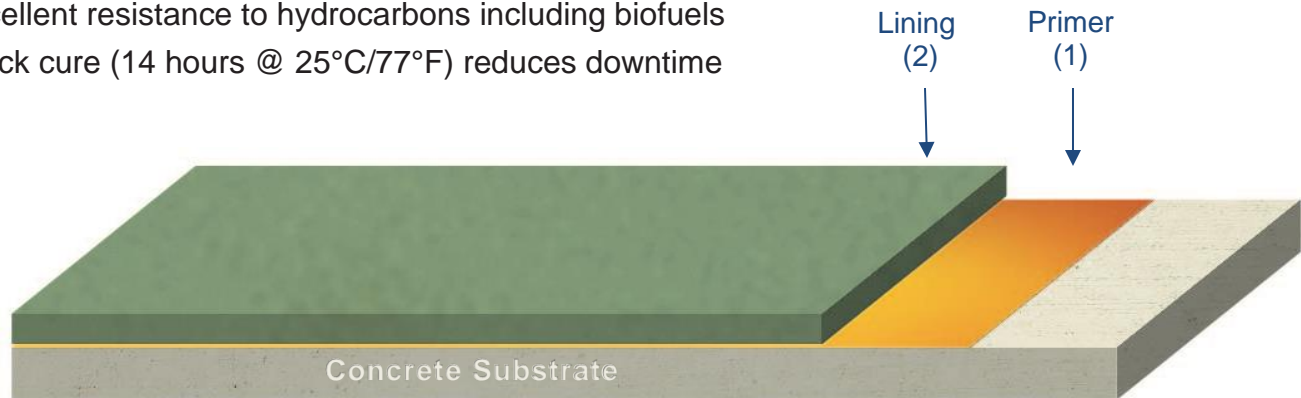

Typical total system thickness: 1000µm (40mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 680M Resin	5 m ² /litre	200 sq.ft./gal.	
2	Lining	750µm	30mil	Enviroline 376F-60	1.1 m ² /litre	45 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/enviroline-376f-60>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

** All coverage rates are practical, for guidance only and may vary due to a number of factors.