



# Polibrid® 705E System

- Solvent free Elastomeric Urethane
- Excellent impact and abrasion resistance
- Dynamic crack bridging up to 1mm (40mil)

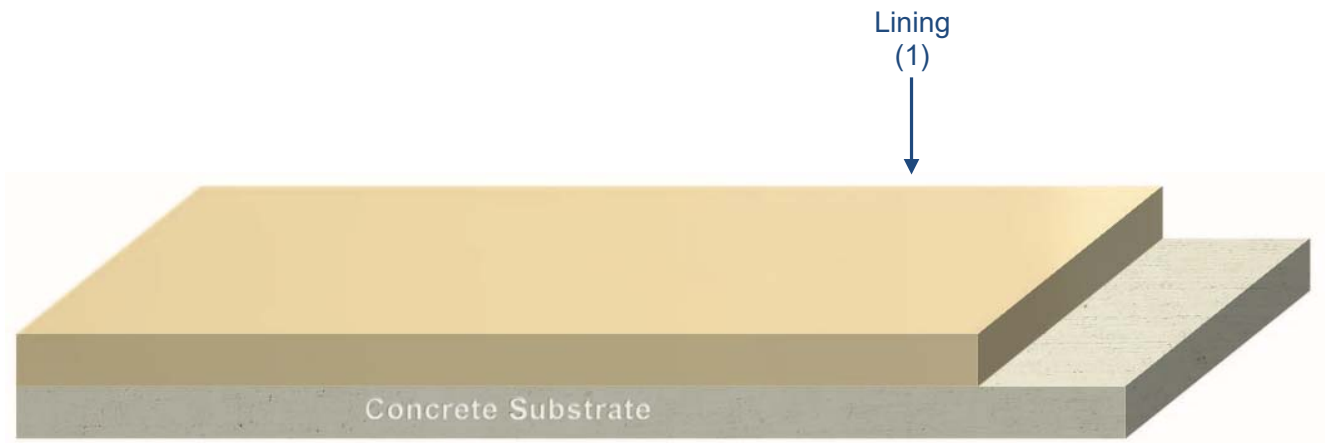

**Typical total system thickness: 2000µm (80mil)**

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Lining	2000µm	80mil	Polibrid 705E	0.5 m <sup>2</sup> /litre	20 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/polibrid-705e>

## Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

\*All thicknesses given are typical and may change dependent on service conditions.

\*\*Coverage rates are practical, for guidance only and may vary due to a number of factors.

Where specified Polibrid 670HS can be used as a primer for Polibrid 705E

[international-pc.com](https://www.international-pc.com)

Version 1-2019