




Enviroline® 405HTR

- Epoxy novolac linings - 100% volume solids
- Incorporates pre-dispersed glass fibre and flake filling
- Excellent high temperature resistance to hydrocarbons including biofuels
- Quick cure (14 hours @ 25°C/77°F) reduces downtime

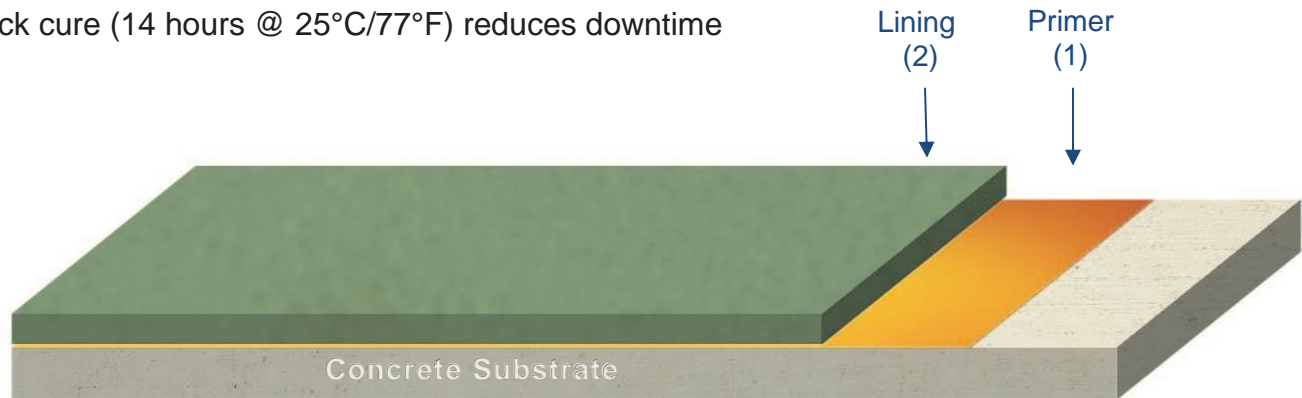

Typical total system thickness: 750µm (30mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 680M Resin	5 m ² /litre	200 sq.ft./gal.	
2	Lining	750µm	30mil	Enviroline 405HTR	1.1 m ² /litre	45 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/enviroline-405htr>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

**All coverage rates are practical, for guidance only, and may vary due to a number of factors