






# Ceilcote® 662 MR Flakeline System

- Glass flake epoxy novolac lining over a mat reinforced basecoat
- Excellent chemical resistance
- Reinforced, high build for added strength, durability and dynamic crack bridging

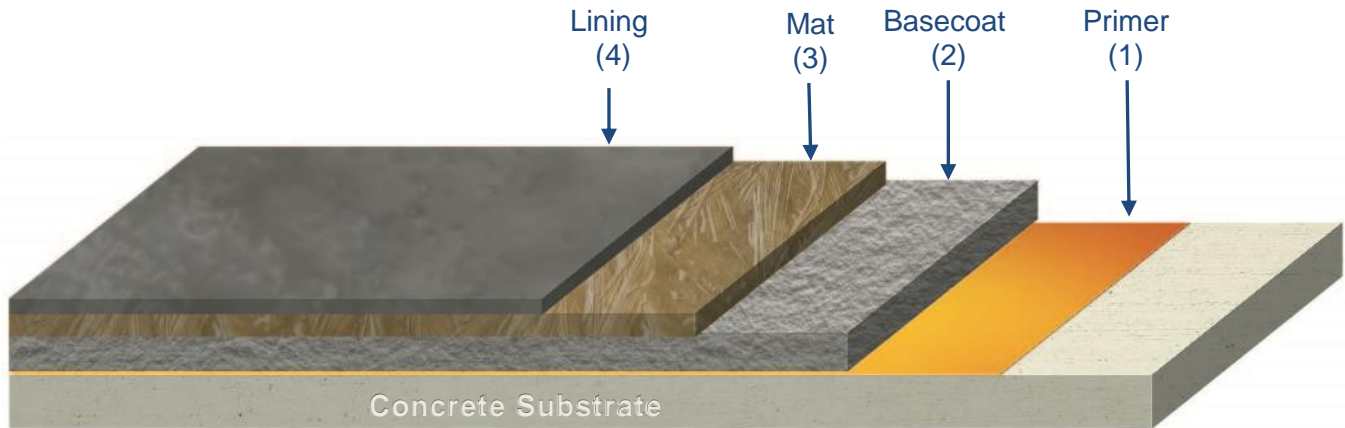

**Typical total system thickness: 2700µm (108mil)**

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 680M Resin	5 m <sup>2</sup> /litre	200 sq.ft./gal.	
2	Basecoat	1500µm	60mil	Ceilcote 800 Resin	1.4 m <sup>2</sup> /litre	56 sq.ft./gal.	
				Ceilcote S1 Powder	9.3m <sup>2</sup> per 22.65kg bag 100 sq.ft. per 50 lb. bag		
3	Reinforcement Mat	800µm	32mil	Ceilcote 800 Resin	1.6 m <sup>2</sup> /litre	64 sq.ft./gal.	
				Ceilcote FG mat (450 gram/m <sup>2</sup> - 1.5oz.)	Allow 10% extra		
4	Lining	400µm	16mil	Ceilcote 662 Flakeline	2.1 m <sup>2</sup> /litre	85 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/ceilcote-662mr-flakeline-system>

## Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

\*All thicknesses given are typical and may change dependent on service conditions.

\*\*Coverage rates are practical, for guidance only and may vary due to a number of factors.

In some secondary containment applications Ceilcote 680M can be used instead of Ceilcote 800 Coroline