






# Ceilcote® 242AR MR Flakeline System

- Flake filled, abrasion resistant, vinyl ester lining over a mat reinforced basecoat
- Excellent abrasion and chemical resistance
- Reinforced, high build for added strength, durability and dynamic crack bridging

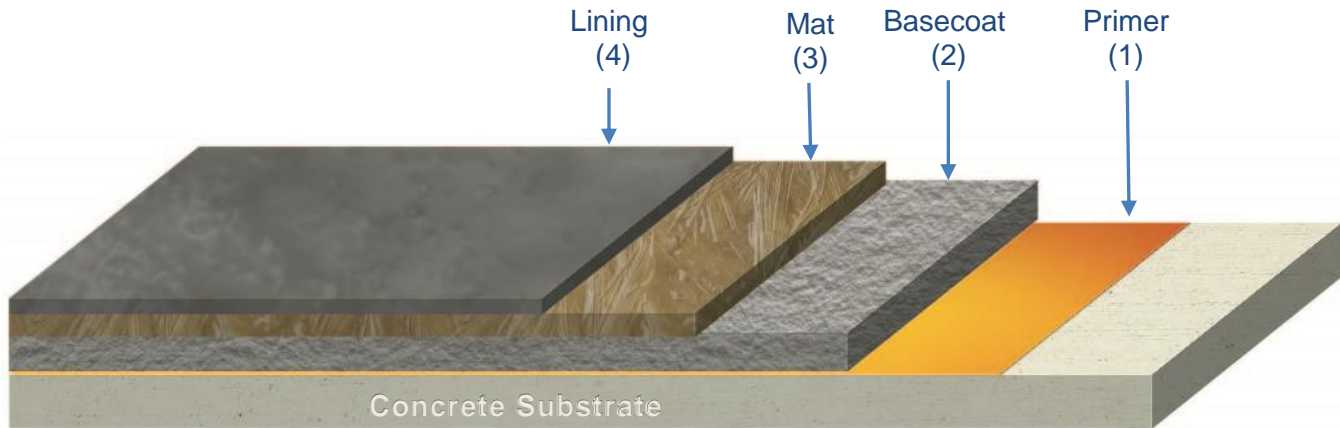

**Typical total system thickness: 2800µm (112mil)**

Layer	Typical Thickness*	Component	Coverage Rate**		Application Methods	
			Metric	Imperial		
1	Primer	Seal concrete	Ceilcote 380 Resin	5 m <sup>2</sup> /litre	200 sq.ft./gal.	
2	Basecoat	1500µm 60mil	Ceilcote 380 Resin	1 m <sup>2</sup> /litre	40 sq.ft./gal.	
			Ceilcote S1 Powder	9.3m <sup>2</sup> per 22.65kg bag 100 sq.ft. per 50 lb. bag		
3	Reinforcement Mat	800µm 32mil	Ceilcote 380 Resin	1.2 m <sup>2</sup> /litre	50 sq.ft./gal.	
			Ceilcote FG mat (450 gram/m <sup>2</sup> - 1.5oz.)	Allow 10% extra		
4	Lining	500µm 20mil	Ceilcote 242AR Flakeline	1.5 m <sup>2</sup> /litre	60 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/ceilcote-242ar-mr-flakeline-system>

## Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

\*All thicknesses given are typical and may change dependent on service conditions.

\*\*All coverage rates are practical, for guidance only and may vary due to a number of factors.

For some chemical environments, Ceilcote 242AR Flakeline may be applied at a thickness of 2x400µm (2x16mil).