





Ceilcote® 242AR Flakeline

- Flake filled, abrasion resistant, vinyl ester lining
- Chemical resistance to a wide range of aggressive chemicals

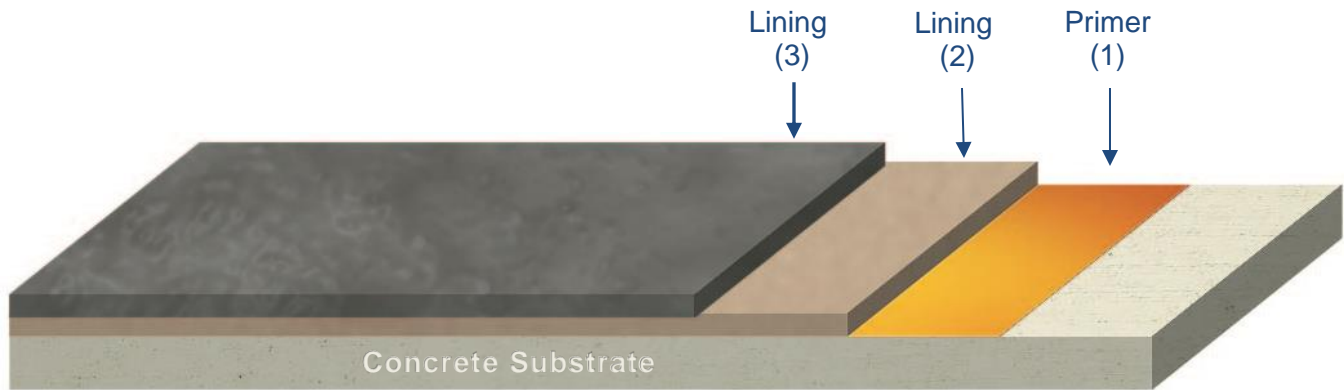

Typical total system thickness: 1000µm (40mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 380 Resin	5 m ² /litre	200 sq.ft./gal.	
2	Lining	500µm	20mil	Ceilcote 242AR Flakeline	1.5 m ² /litre	60 sq.ft./gal.	
3	Lining	500µm	20mil	Ceilcote 242AR Flakeline	1.5 m ² /litre	60 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/ceilcote-242ar-flakeline>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

**All coverage rates are practical, for guidance only and may vary due to a number of factors