




Intercrete® 4852

- Cementitious water based flooring screed
- Improved chemical and abrasion resistance compared to concrete
- Can be applied over wet and green (new) concrete

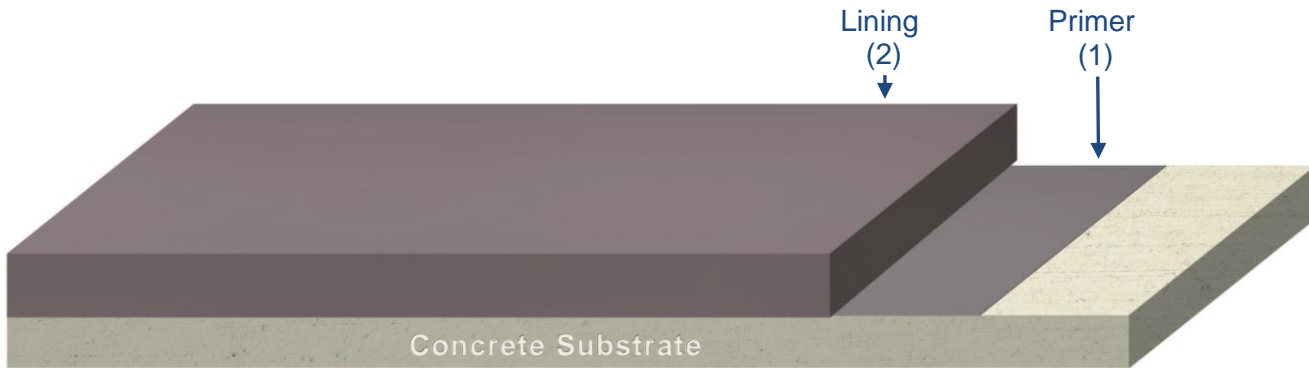

Typical total system thickness: 3000µm (120mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Mist coat		Intercrete 4850	5 m ² /litre	200 sq.ft./gal.	
2	Lining	3000µm	120mil	Intercrete 4852	0.17 m ² /kg	0.8 sq.ft./ lb	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/intercrete-4852>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

** All coverage rates are practical, for guidance only and may vary due to a number of factors