


Ceilcote® 6650 Ceilcrete System

- Novolac vinyl ester resin based, thick film, mat reinforced lining
- Excellent chemical and impact resistance
- Ideal for high traffic areas with chemical attack

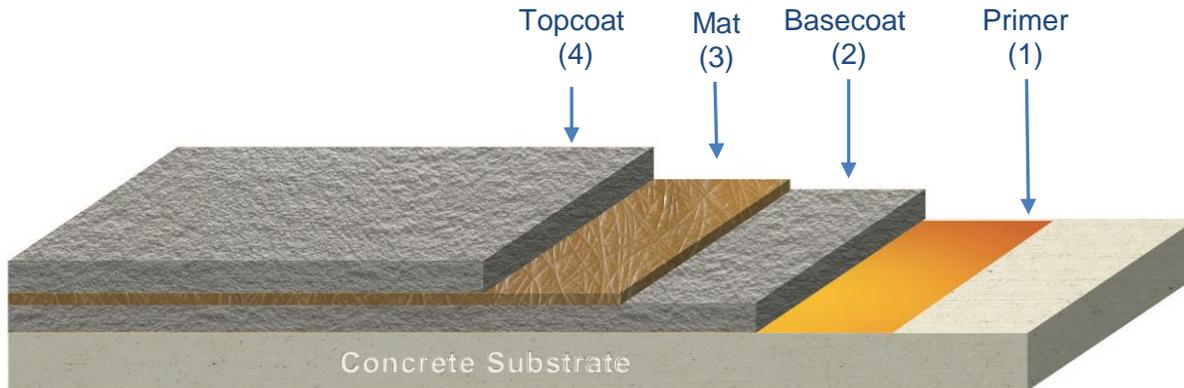

Typical total system thickness: 3800µm (152mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 380 Resin	5 m ² /litre	200 sq.ft./gal.	
2	Basecoat	1500µm	60mil	Ceilcote 370HT Resin	1 m ² /litre	40 sq.ft./gal.	
				Ceilcote S1 Powder	9.3m ² per 22.65kg bag 100 sq.ft. per 50 lb. bag		
3	Reinforcement Mat	800µm	32mil	Ceilcote 370HT Resin	1.2 m ² /litre	50 sq.ft./gal.	
				Ceilcote FG mat (450 gram/m ² - 1.5oz.)	Allow 10% extra		
4	Topcoat	1500µm	60mil	Ceilcote 370HT Resin	1 m ² /litre	40 sq.ft./gal.	
				Ceilcote S1 Powder	9.3m ² per 22.65kg bag 100 sq.ft. per 50 lb. bag		

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/ceilcote-6650-ceilcrete-system>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

**All coverage rates are practical, for guidance only and may vary due to a number of factors.

Topcoat must be smoothed with Ceilcote styrene smoothing liquid