




# Enviroline® 376F-60LT

- Epoxy novolac linings - 100% volume solids
- Incorporates pre-dispersed glass fiber and flake filling
- Excellent resistance to hydrocarbons including biofuels
- Quick winter cure (3 days @ 0°C/32°F) reduces downtime

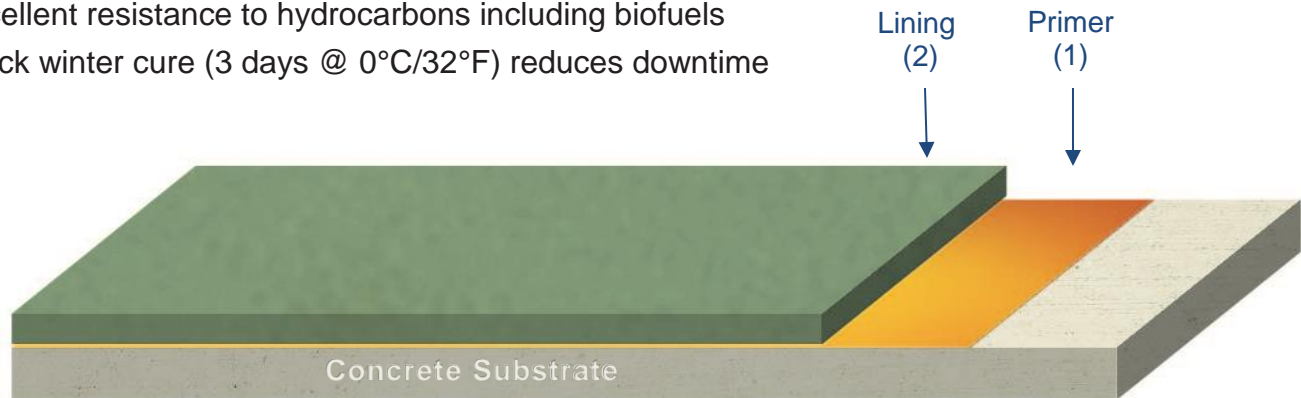

## Typical total system thickness: 750µm (30mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 680M Resin	5 m <sup>2</sup> /litre	200 sq.ft./gal.	
2	Lining	750µm	30mil	Enviroline 376F-60LT	1.1 m <sup>2</sup> /litre	45 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/enviroline-376f-60lt>

### Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

\*All thicknesses given are typical and may change dependent on service conditions.

\*\*All coverage rates are practical, for guidance only and may vary due to a number of factors