





Interline® 955

- Glass flake filled novolac vinyl ester lining
- Excellent chemical and temperature resistance

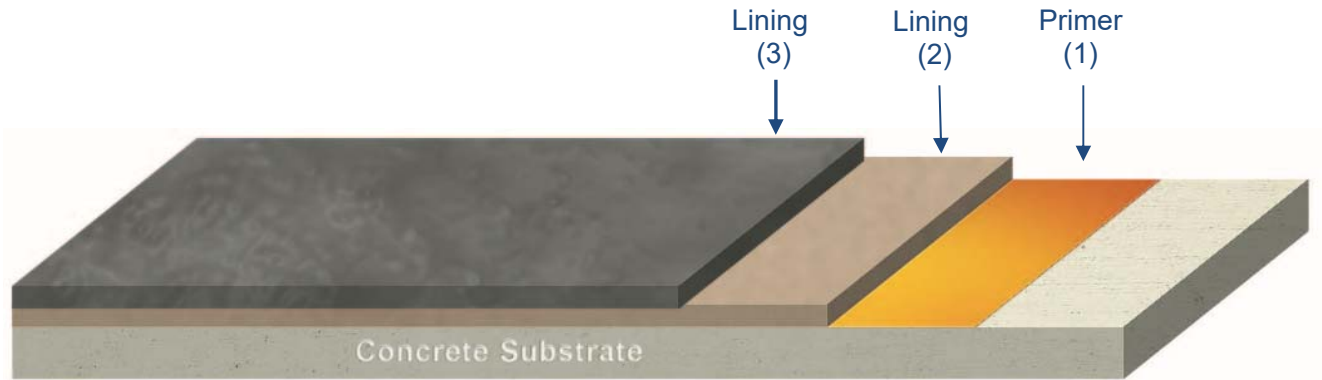

Typical total system thickness: 1000µm (16mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 370HT Resin	5 m ² /litre	200 sq.ft./gal.	
2	Lining	500µm	16mil	Interline 955	1.5 m ² /litre	60 sq.ft./gal.	
3	Lining	500µm	16mil	Interline 955	1.5 m ² /litre	60 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/interline-955>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

**All coverage rates are practical, for guidance only and may vary due to a number of factors