





Ceilcote® 662 Flakeline

- Glass flake filled novolac epoxy lining
- Chemical resistance

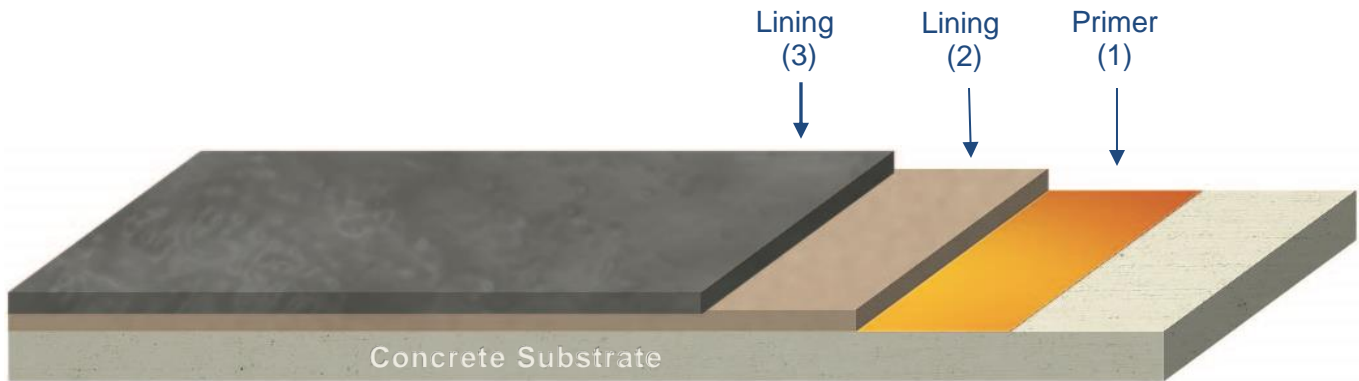

Typical total system thickness: 1000µm (40mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 680M Resin	5 m ² /litre	200 sq.ft./gal.	
2	Lining	500µm	16mil	Ceilcote 662 Flakeline	1.7 m ² /litre	70 sq.ft./gal.	
3	Lining	500µm	16mil	Ceilcote 662 Flakeline	1.7 m ² /litre	70 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/ceilcote-662-flakeline>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

** All coverage rates are practical, for guidance only and may vary due to a number of factors.